

Hvordan ændre operatør til Circle K på Charge Amps Aura lader

For at ændre operatør (OCPP)-indstillingerne til Circle K, skal du bruge:

- Serienummer/Lade-ID (slutter med A)
- PIN-kode (8 cifre)
- Mobil eller bærbar computer med WIFI
- Du skal være i nærheden af laderen (1 meter), når du foretager indstillingerne.


1. Genstart laderen manuelt

Efter genstart har du 10 minutter til at udføre følgende trin i laderens indstillinger:

- Gør dette med en lader ad gangen
- Ophold dig tæt på laderen (1 meter), skift til flytilstand på din enhed (for at undgå automatisk login til andre netværk)


2. Opret forbindelse til et WiFi (fra en bærbar computer eller mobil) til:

- Navn: AURA_XXXXXXA, hvor XXXXX er de sidste 6 cifre i laderens lade-ID
- Adgangskode: PIN til laderen

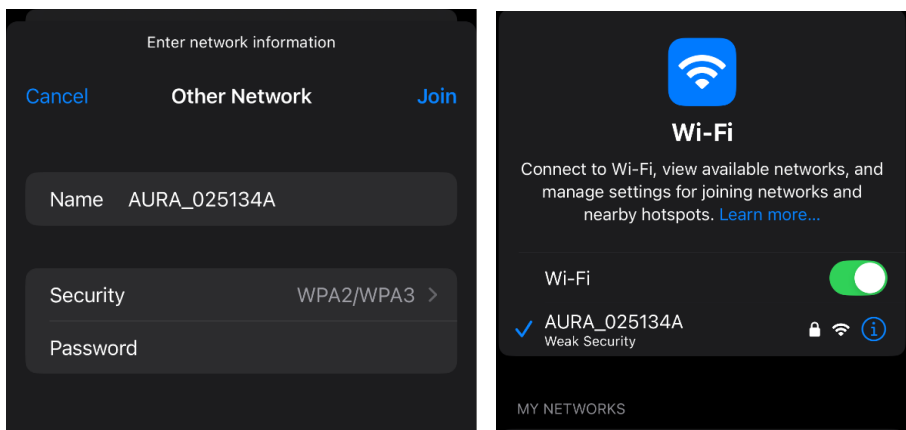


3. I en webbrowser, gå til 192.168.250.1

Log ind med din PIN-kode.

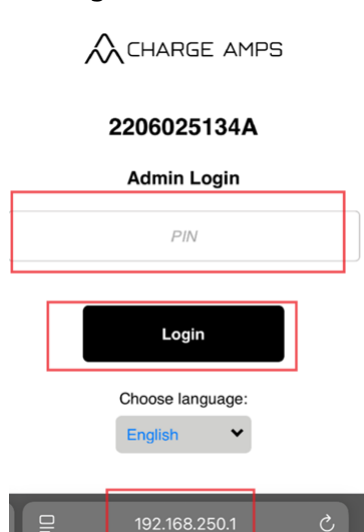

4. Tryk på pil ned, og vælg OCPP.

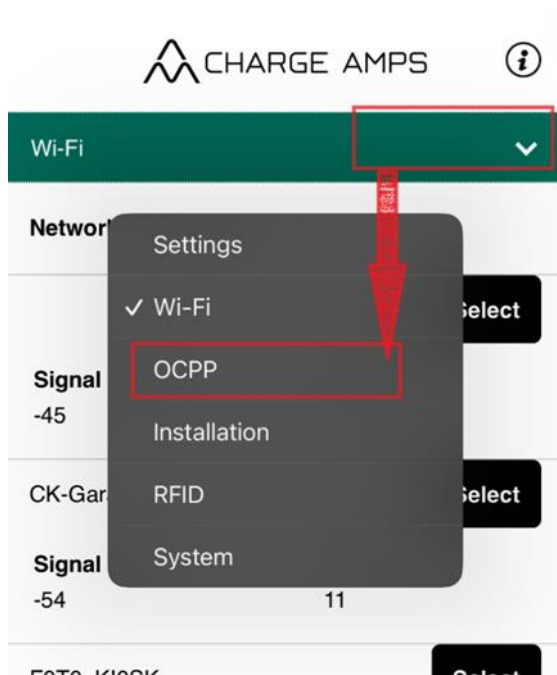

Indtast følgende oplysninger og tryk på Opdater:

- OCPP link: `wss://ocpp.circlek.com/`
- Laderens ID: Serienummer/Lade-ID (slutter med A)
- Autorisationsnøgle: PIN-kode

A screenshot of the CHARGE AMPS app's OCPP configuration screen. The top header bar is dark green and labeled 'OCPP'. Below, there are three input fields: 'OCPP endpoint:' with the value 'wss://ocpp.charge.space/ocpp', 'Chargpoint ID:' with the value '2206025134A', and 'Authorization key:' which is empty. A red arrow points from the 'Authorization key' field down to a black 'Update' button at the bottom.