

CHARGE AMPS AURA - CPMS GUIDE

For at ændre operatør (OCPP)-indstillingerne til Circle K, skal du bruge:

- Serienummer/Lade-ID (slutter med A)
- PIN-kode (8 cifre)
- Mobil eller bærbar computer med WIFI
- Du skal være i nærheden af laderen (1 meter), når du foretager indstillingerne.



1. Genstart laderen manuelt

Efter genstart har du 10 minutter til at udføre følgende trin i laderens indstillinger:

- Gør dette med en lader ad gangen
- Ophold dig tæt på laderen (1 meter), skift til flytilstand på din enhed (for at undgå automatisk login til andre netværk)

2. Opret forbindelse til et WiFi (fra en bærbar computer eller mobil) til:

- Navn: AURA_XXXXXXA, hvor XXXXX er de sidste 6 cifre i laderens lade-ID
- Adgangskode: PIN til laderen

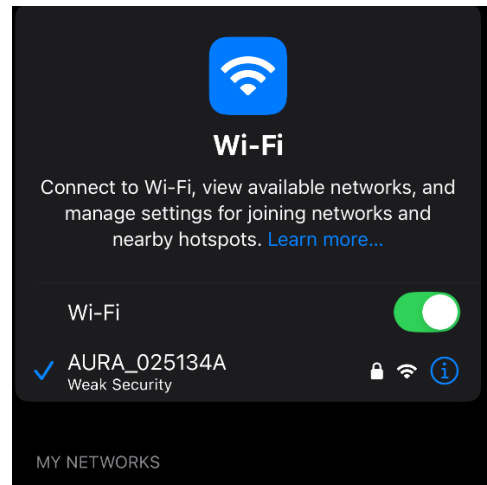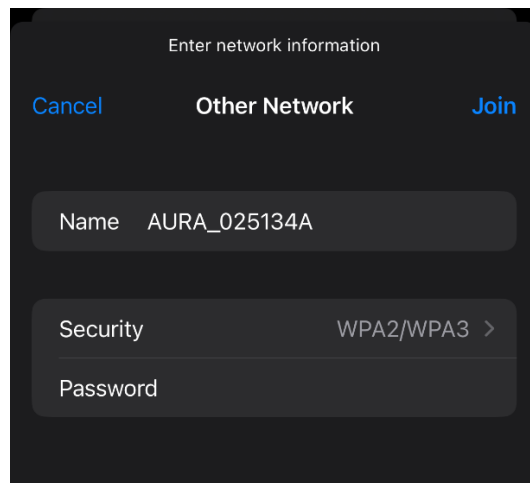

3. I en webbrowser, gå til 192.168.250.1

Log ind med din PIN-kode.




2206025134A

Admin Login

Choose language:

A mobile browser address bar showing the URL 192.168.250.1. The address bar has a hamburger menu icon on the left and a refresh icon on the right. The URL 192.168.250.1 is highlighted with a red box.

4. Tryk på pil ned, og vælg OCPP.

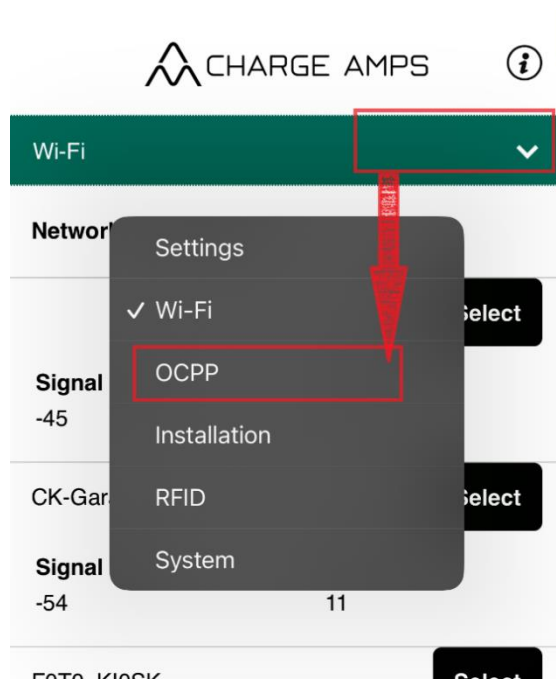

Indtast følgende oplysninger og tryk på Opdater:

- **OCPP link:** `wss://ocpp-circlek.driivz.com/stationServer/websocket`
- **Laderens ID:** Serienummer/Lade-ID (slutter med A)
- **Autorisationsnøgle:** PIN-kode

A screenshot of the CHARGE AMPS app showing the OCPP configuration screen. The top bar is green with 'OCPP' and a dropdown arrow. Below, there are three input fields: 'OCPP endpoint:' with the value 'wss://ocpp.charge.space/ocpp', 'Chargpoint ID:' with the value '2206025134A', and 'Authorization key:' which is empty. A red box highlights the 'Update' button at the bottom, with a red arrow pointing to it from the 'Authorization key' field.